

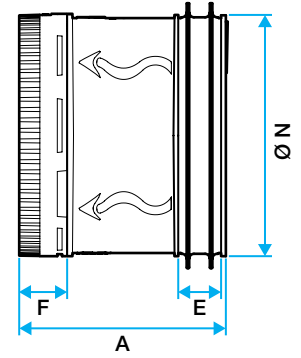


Régulateur de débit
Modulo

Dimensions

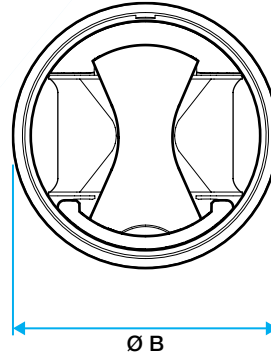

Description

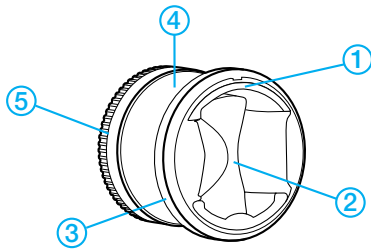

- ①Cale en plastique PC/ ABS - M1 (Euroclasse B s3 d0),,
 ②Membrane en silicone,
 ③Joint double lèvres en élastomère,
 ④Corps en plastique PC/ ABS - M1 (Euroclasse B s3 d0),
 ⑤Bague de réglage rotative en plastique PC/ABS - M1 (Euroclasse B s3 d0)

| mm | | | | | | |
|----------------------------------|-----|-----|----|---|-----|------|
| Ø conduit | Ø N | Ø B | E | F | A | kg |
| 80 | 76 | 85 | 14 | 3 | 65 | 0,08 |
| 100 | 92 | 105 | 14 | 4 | 70 | 0,12 |
| 125 | 116 | 132 | 14 | 4 | 70 | 0,15 |
| 125 15-95 m ³ /h | | | | | | |
| 125 100-190 m ³ /h | 116 | 132 | 14 | 4 | 110 | 0,17 |
| 150 | 147 | 153 | 14 | 4 | 118 | 0,37 |
| 160 | 153 | 167 | 14 | 4 | 118 | 0,37 |
| 200 | 190 | 210 | 20 | 7 | 144 | 0,59 |
| 250 | 238 | 262 | 20 | 5 | 179 | 1,02 |

Les informations suivantes sont indiquées directement sur le MR:

- direction de l'air, diamètres en mm et en inch, plage de pression différentielle
- la table de correspondance des débits ajustables (en m³/h et en cfm).

| Ø | N° d'article | | | | | |
|-----|---------------------|---|-------------------|-----|-------------------|-----|
| | | | m ³ /h | cfm | m ³ /h | cfm |
| 80 | 99.110.16307 | K | 20 | 12 | 35 | 20 |
| | | I | 25 | 15 | 40 | 22 |
| | | H | 30 | 18 | - | - |
| | | G | - | - | 45 | 25 |
| | | F | - | - | 50 | 30 |
| | | B | - | - | 60 | 35 |
| 100 | 99.110.16308 | L | 15 | 10 | - | - |
| | | J | 20 | 12 | - | - |
| | | H | 25 | 15 | - | - |
| | | F | 30 | 18 | - | - |
| | | E | 35 | 20 | 70 | 41 |
| | | D | 40 | 22 | 75 | 44 |
| | | C | 45 | 25 | 80 | 47 |
| | | A | 55 | 33 | 90 | 53 |

| Ø | N° d'article | | | | | | | |
|-----|---------------------|-----|---------------------|-----|-------------------|-----|--|--|
| | | | m ³ /h | cfm | m ³ /h | cfm | | |
| 125 | 99.110.16309 | L | 15 | 10 | - | - | | |
| | | I | 25 | 15 | - | - | | |
| | | G | - | - | 60 | 35 | | |
| | | F | 30 | 18 | 65 | 38 | | |
| | | D | - | - | 70 | 40 | | |
| | | C | - | - | 75 | 45 | | |
| | | B | 45 | 25 | 80 | 48 | | |
| | | A | 50 | 30 | 85 | 50 | | |
| | | 125 | 99.110.16310 | K | 100 | 60 | | |
| | | | | J | 110 | 65 | | |
| I | 120 | | | 70 | | | | |
| H | 130 | | | 75 | | | | |
| G | 140 | | | 80 | | | | |
| E | 150 | | | 90 | | | | |
| C | 160 | | | 95 | | | | |
| A | 190 | | | 110 | | | | |

| Ø | N° d'article | | | |
|-----|---------------------|---|-------------------|-----|
| | | | m ³ /h | cfm |
| 150 | 99.110.16311 | R | 100 | 60 |
| | | P | 110 | 65 |
| | | O | 120 | 70 |
| | | M | 130 | 75 |
| | | L | 140 | 80 |
| | | K | 150 | 90 |
| | | J | 160 | 95 |
| | | H | 170 | 100 |
| | | G | 180 | 105 |
| | | F | 190 | 110 |
| 160 | 99.110.16312 | E | 200 | 120 |
| | | D | 210 | 125 |
| | | A | 240 | 140 |

| Ø | N° d'article | | | |
|-----|---------------------|---|-------------------|-----|
| | | | m ³ /h | cfm |
| 200 | 99.110.16313 | U | 225 | 130 |
| | | S | 250 | 150 |
| | | Q | 275 | 160 |
| | | N | 300 | 175 |
| | | M | 325 | 190 |
| | | J | 350 | 205 |
| | | D | 400 | 235 |

| Ø | N° d'article | | | |
|-----|---------------------|---|-------------------|-----|
| | | | m ³ /h | cfm |
| 250 | 99.110.16314 | U | 300 | 175 |
| | | R | 355 | 205 |
| | | O | 400 | 235 |
| | | L | 450 | 265 |
| | | I | 500 | 295 |
| | | G | 550 | 325 |
| | | A | 650 | 385 |